

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

## NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of  
Inventor(s): Ronald P. Bianchini, Jr.

**WARNING:** 37 C.F.R. § 1.41(a)(1) points out:

"(a) A patent is applied for in the name or names of the actual inventor or inventors.

"(1) The inventorship of a nonprovisional application is that inventorship set forth in the oath or declaration as prescribed by § 1.63, except as provided for in § 1.53(d)(4) and § 1.63(d). If an oath or declaration as prescribed by § 1.63 is not filed during the pendency of a nonprovisional application, the inventorship is that inventorship set forth in the application papers filed pursuant to § 1.53(b), unless a petition under this paragraph accompanied by the fee set forth in § 1.17(i) is filed supplying or changing the name or names of the inventor or inventors."

For (title): VERY WIDE MEMORY TDM SWITCHING SYSTEM

---

**CERTIFICATION UNDER 37 C.F.R. 1.10\***

(Express Mail label number is mandatory.)

(Express Mail certification is optional.)

I hereby certify that this New Application Transmittal and the documents referred to as attached therein are being deposited with the United States Postal Service on this date April 15, 1999 in an envelope as "Express Mail Post Office to Addressee," mailing Label Number EL262550856US, addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Tracey L. Milka

(type or print name of person mailing paper)

Tracey L. Milka

Signature of person mailing paper

**WARNING:** Certificate of mailing (first class) or facsimile transmission procedures of 37 C.F.R. 1.8 cannot be used to obtain a date of mailing or transmission for this correspondence.

**\*WARNING:** Each paper or fee filed by "Express Mail" **must** have the number of the "Express Mail" mailing label placed thereon prior to mailing. 37 C.F.R. 1.10(b).

"Since the filing of correspondence under § 1.10 without the Express Mail mailing label thereon is an oversight that can be avoided by the exercise of reasonable care, requests for waiver of this requirement will **not** be granted on petition." Notice of Oct. 24, 1996, 60 Fed. Reg. 56,439, at 56,442.

(Application Transmittal [4-1]—page 1 of 10)

## 1. Type of Application

This new application is for a(n)

(check one applicable item below)

- ☒ Original (nonprovisional)  
☐ Design  
☐ Plant

**WARNING:** Do not use this transmittal for a completion in the U.S. of an International Application under 35 U.S.C. 371(c)(4), unless the International Application is being filed as a divisional, continuation or continuation-in-part application.

**WARNING:** Do not use this transmittal for the filing of a provisional application.

**NOTE:** If one of the following 3 items apply, then complete and attach ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF A PRIOR U.S. APPLICATION CLAIMED and a NOTIFICATION IN PARENT APPLICATION OF THE FILING OF THIS CONTINUATION APPLICATION.

- ☐ Divisional.  
☐ Continuation.  
☐ Continuation-in-part (C-I-P).

## 2. Benefit of Prior U.S. Application(s) (35 U.S.C. 119(e), 120, or 121)

**NOTE:** A nonprovisional application may claim an invention disclosed in one or more prior filed copending nonprovisional applications or copending international applications designating the United States of America. In order for a nonprovisional application to claim the benefit of a prior filed copending nonprovisional application or copending international application designating the United States of America, each prior application must name as an inventor at least one inventor named in the later filed nonprovisional application and disclose the named inventor's invention claimed in at least one claim of the later filed nonprovisional application in the manner provided by the first paragraph of 35 U.S.C. 112. Each prior application must also be:

(i) An international application entitled to a filing date in accordance with PCT Article 11 and designating the United States of America; or

(ii) Complete as set forth in § 1.51(b); or

(iii) Entitled to a filing date as set forth in § 1.53(b) or § 1.53(d) and include the basic filing fee set forth in § 1.16; or

(iv) Entitled to a filing date as set forth in § 1.53(b) and have paid therein the processing and retention fee set forth in § 1.21(f) within the time period set forth in § 1.53(f).

37 C.F.R. § 1.78(a)(1).

**NOTE:** If the new application being transmitted is a divisional, continuation or a continuation-in-part of a parent case, or where the parent case is an International Application which designated the U.S., or benefit of a prior provisional application is claimed, then check the following item and complete and attach ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

**WARNING:** If an application claims the benefit of the filing date of an earlier filed application under 35 U.S.C. 120, 121 or 365(c), the 20-year term of that application will be based upon the filing date of the earliest U.S. application that the application makes reference to under 35 U.S.C. 120, 121 or 365(c). (35 U.S.C. 154(a)(2) does not take into account, for the determination of the patent term, any application on which priority is claimed under 35 U.S.C. 119, 365(a) or 365(b).) For a c-i-p application, applicant should review whether any claim in the patent that will issue is supported by an earlier application and, if not, the applicant should consider canceling the reference to the earlier filed application. The term of a patent is not based on a claim-by-claim approach. See Notice of April 14, 1995, 60 Fed. Reg. 20,195, at 20,205.

**WARNING:** When the last day of pendency of a provisional application falls on a Saturday, Sunday, or Federal holiday within the District of Columbia, any nonprovisional application claiming benefit of the provisional application must be filed prior to the Saturday, Sunday, or Federal holiday within the District of Columbia. See 37 C.F.R. § 1.78(a)(3).

- ☐ The new application being transmitted claims the benefit of prior U.S. application(s). Enclosed are ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

### 3. Papers Enclosed

A. Required for filing date under 37 C.F.R. § 1.53(b) (Regular) or 37 C.F.R. § 1.153 (Design) Application

24 Pages of specification

7 Pages of claims

4 Sheets of drawing

- ☐ formal  
☒ informal

B. Other Papers Enclosed

2 Pages of Abstract

0 Other

**WARNING:** DO NOT submit original drawings. A high quality copy of the drawings should be supplied when filing a patent application. The drawings that are submitted to the Office must be on strong, white, smooth, and non-shiny paper and meet the standards according to § 1.84. If corrections to the drawings are necessary, they should be made to the original drawing and a high-quality copy of the corrected original drawing then submitted to the Office. Only one copy is required or desired. For comments on proposed then-new 37 CFR 1.84, see Notice of March 9, 1988 (1990 O.G. 57-62).

**NOTE:** "Identifying indicia, if provided, should include the application number or the title of the invention, inventor's name, docket number (if any), and the name and telephone number of a person to call if the Office is unable to match the drawings to the proper application. This information should be placed on the back of each sheet of drawing a minimum distance of 1.5 cm. (5/8 inch) down from the top of the page . . ." 37 C.F.R. 1.84(c)).

(complete the following, if applicable)

- ☐ The enclosed drawing(s) are photograph(s), and there is also attached a "PETITION TO ACCEPT PHOTOGRAPH(S) AS DRAWING(S)." 37 C.F.R. 1.84(b).

### 4. Additional papers enclosed

- ☐ Preliminary Amendment  
☐ Information Disclosure Statement (37 C.F.R. 1.98)  
☐ Form PTO-1449 (PTO/SB/08A and 08B)  
☐ Citations  
☐ Declaration of Biological Deposit  
☐ Submission of "Sequence Listing," computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequence.  
☐ Authorization of Attorney(s) to Accept and Follow Instructions from Representative  
☐ Special Comments  
☐ Other

## 5. Declaration or oath

**NOTE:** A newly executed declaration is not required in a continuation or divisional application provided that the prior nonprovisional application contained a declaration as required, the application being filed is by all or fewer than all the inventors named in the prior application, there is no new matter in the application being filed, and a copy of the executed declaration filed in the prior application (showing the signature or an indication thereon that it was signed) is submitted. The copy must be accompanied by a statement requesting deletion of the names of person(s) who are not inventors of the application being filed. If the declaration in the prior application was filed under § 1.47, then a copy of that declaration must be filed accompanied by a copy of the decision granting § 1.47 status or, if a nonsigning person under § 1.47 has subsequently joined in a prior application, then a copy of the subsequently executed declaration must be filed. See 37 C.F.R. §§ 1.63(d).

☒ Enclosed

Executed by

(check all applicable boxes)

☒ inventor(s).

☐ legal representative of inventor(s).  
37 CFR 1.42 or 1.43.

☐ joint inventor or person showing a proprietary  
interest on behalf of inventor who refused to sign  
or cannot be reached.

☐ This is the petition required by 37 CFR 1.47 and the statement  
required by 37 CFR 1.47 is also attached. See item 13 below for  
fee.

☐ Not Enclosed.

**NOTE:** Where the filing is a completion in the U.S. of an International Application or where the completion of the U.S. application contains subject matter in addition to the International Application, the application may be treated as a continuation or continuation-in-part, as the case may be, utilizing ADDED PAGE FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION CLAIMED.

☐ Application is made by a person authorized under 37 C.F.R. 1.41(c) on behalf  
of all the above named inventor(s).

(The declaration or oath, along with the surcharge required by 37 CFR 1.16(e)  
can be filed subsequently).

**NOTE:** It is important that all the correct inventor(s) are named for filing under 37 CFR 1.41(c) and 1.53(b).

☐ Showing that the filing is authorized.  
(not required unless called into question. 37 CFR 1.41(d))

## 6. Inventorship Statement

**WARNING:** If the named inventors are each not the inventors of all the claims an explanation, including the ownership of the various claims at the time the last claimed invention was made, should be submitted.

The inventorship for all the claims in this application are:

☒ The same.

or

☐ Not the same. An explanation, including the ownership of the various claims at  
the time the last claimed invention was made,

☐ is submitted.

☐ will be submitted.

## 7. Language

**NOTE:** An application including a signed oath or declaration may be filed in a language other than English. An English translation of the non-English language application and the processing fee of \$130.00 required by 37 CFR 1.17(k) is required to be filed with the application, or within such time as may be set by the Office. 37 CFR 1.52(d).

☒ English

☐ Non-English

☐ The attached translation includes a statement that the translation is accurate. 37 C.F.R. 1.52(d).

## 8. Assignment

☒ An assignment of the invention to FORE Systems, Inc.

☒ is attached. A separate ☒ "COVER SHEET FOR ASSIGNMENT (DOCUMENT) ACCOMPANYING NEW PATENT APPLICATION" or ☐ FORM PTO 1595 is also attached.

☐ will follow.

**NOTE:** "If an assignment is submitted with a new application, send two separate letters—one for the application and one for the assignment." Notice of May 4, 1990 (1114 O.G. 77-78).

**WARNING:** A newly executed "CERTIFICATE UNDER 37 CFR 3.73(b)" must be filed when a continuation-in-part application is filed by an assignee. Notice of April 30, 1993, 1150 O.G. 62-64.

## 9. Certified Copy

Certified copy(ies) of application(s)

Country	Appin. No.	Filed
Country	Appin. No.	Filed
Country	Appin. No.	Filed

from which priority is claimed

☐ is (are) attached.

☐ will follow.

**NOTE:** The foreign application forming the basis for the claim for priority must be referred to in the oath or declaration. 37 CFR 1.55(a) and 1.63.

**NOTE:** This item is for any foreign priority for which the application being filed directly relates. If any parent U.S. application or International Application from which this application claims benefit under 35 U.S.C. 120 is itself entitled to priority from a prior foreign application, then complete item 18 on the ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

10. Fee Calculation (37 C.F.R. 1.16)

A. ☒ Regular application

CLAIMS AS FILED			
Number filed	Number Extra	Rate	Basic Fee 37 C.F.R. 1.16(a) \$790.00
Total			
Claims (37 CFR 1.16(c)) $24 - 20 = 4$	$\times$	\$ 22.00	72.00
Independent			
Claims (37 CFR 1.16(b)) $5 - 3 = 2$	$\times$	\$ 82.00	156.00
Multiple dependent claim(s), if any (37 CFR 1.16(d))			
	$+$	\$270.00	

- ☐ Amendment cancelling extra claims is enclosed.  
☐ Amendment deleting multiple-dependencies is enclosed.  
☐ Fee for extra claims is not being paid at this time.

NOTE: If the fees for extra claims are not paid on filing they must be paid or the claims cancelled by amendment, prior to the expiration of the time period set for response by the Patent and Trademark Office in any notice of fee deficiency. 37 CFR 1.16(d).

Filing Fee Calculation \$ 988.00

B. ☐ Design application  
(\$330.00—37 CFR 1.16(f))

Filing Fee Calculation \$

C. ☐ Plant application  
(\$540.00—37 CFR 1.16(g))

Filing fee calculation \$

11. Small Entity Statement(s)

- ☐ Statement(s) that this is a filing by a small entity under 37 CFR 1.9 and 1.27 is (are) attached.

**WARNING:** "Status as a small entity must be specifically established in each application or patent in which the status is available and desired. Status as a small entity in one application or patent does not affect any other application or patent, including applications or patents which are directly or indirectly dependent upon the application or patent in which the status has been established. The refiling of an application under § 1.53 as a continuation, division, or continuation-in-part (including a continued prosecution application under § 1.53(d)), or the filing of a reissue application requires a new determination as to continued entitlement to small entity status for the continuing or reissue application. A nonprovisional application claiming benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) of a prior application, or a reissue application may rely on a statement filed in the prior application or in the patent if the nonprovisional application or the reissue application includes a reference to the statement in the prior application or in the patent or includes a copy of the statement in the prior application or in the patent and status as a small entity is still proper and desired. The payment of the small entity basic statutory filing fee will be treated as such a reference for purposes of this section." 37 C.F.R. § 1.28(a)(2).

(Application Transmittal [4-1]—page 6 of 10)

(complete the following, if applicable)

- ☐ Status as a small entity was claimed in prior application  
\_\_\_\_\_ / \_\_\_\_\_, filed on \_\_\_\_\_, from which benefit  
is being claimed for this application under:

35 U.S.C. ☐ 119(e),  
☐ 120,  
☐ 121,  
☐ 365(c),

and which status as a small entity is still proper and desired.

- ☐ A copy of the statement in the prior application is included.

Filing Fee Calculation (50% of A, B or C above)

\$ \_\_\_\_\_

NOTE: Any excess of the full fee paid will be refunded if small entity status is established and a refund request are filed within 2 months of the date of timely payment of a full fee. The two-month period is not extendable under § 1.136. 37 CFR 1.28(a).

**12. Request for International-Type Search (37 C.F.R. 1.104(d))**

(complete, if applicable)

- ☐ Please prepare an international-type search report for this application at the time when national examination on the merits takes place.

**13. Fee Payment Being Made at This Time**

- ☐ Not Enclosed

- ☐ No filing fee is to be paid at this time.  
(This and the surcharge required by 37 C.F.R. 1.16(e) can be paid subsequently.)

- ☒ Enclosed

- |   |           |
|---|-----------|
| <input checked="" type="checkbox"/> Filing fee  | \$ 988.00 |
| <input type="checkbox"/> Recording assignment<br>(\$40.00; 37 C.F.R. 1.21(h))<br>(See attached "COVER SHEET FOR<br>ASSIGNMENT ACCOMPANYING NEW<br>APPLICATION".)  | \$ _____  |
| <input type="checkbox"/> Petition fee for filing by other than all the<br>inventors or person on behalf of the inventor<br>where inventor refused to sign or cannot be<br>reached<br>(\$130.00; 37 C.F.R. 1.47 and 1.17(l)) | \$ _____  |
| <input type="checkbox"/> For processing an application with a<br>specification in<br>a non-English language<br>(\$130.00; 37 C.F.R. 1.52(d) and 1.17(k))  | \$ _____  |
| <input type="checkbox"/> Processing and retention fee<br>(\$130.00; 37 C.F.R. 1.53(d) and 1.21(l))  | \$ _____  |
| <input type="checkbox"/> Fee for international-type search report<br>(\$40.00; 37 C.F.R. 1.21(e))   | \$ _____  |

NOTE: 37 CFR 1.21(f) establishes a fee for processing and retaining any application that is abandoned for failing to complete the application pursuant to 37 CFR 1.53(f) and this, as well as the changes to 37 CFR 1.53 and 1.78(a)(1), indicate that in order to obtain the benefit of a prior U.S. application, either the basic filing fee must be paid, or the processing and retention fee of § 1.21(f) must be paid, within 1 year from notification under § 53(f).

Total fees enclosed

\$ 988.00

#### 14. Method of Payment of Fees

- ☒ Check in the amount of \$ 988.00
- ☐ Charge Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_

A duplicate of this transmittal is attached.

NOTE: Fees should be itemized in such a manner that it is clear for which purpose the fees are paid. 37 CFR 1.22(b).

#### 15. Authorization to Charge Additional Fees

**WARNING:** If no fees are to be paid on filing, the following items should not be completed.

**WARNING:** Accurately count claims, especially multiple dependent claims, to avoid unexpected high charges, if extra claim charges are authorized.

- ☒ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 19-0737:

- ☒ 37 C.F.R. 1.16(a), (f) or (g) (filing fees)
- ☒ 37 C.F.R. 1.16(b), (c) and (d) (presentation of extra claims)

NOTE: Because additional fees for excess or multiple dependent claims not paid on filing or on later presentation must only be paid or these claims cancelled by amendment prior to the expiration of the time period set for response by the PTO in any notice of fee deficiency (37 CFR 1.16(d)), it might be best not to authorize the PTO to charge additional claim fees, except possibly when dealing with amendments after final action.

- ☐ 37 C.F.R. 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)
- ☐ 37 C.F.R. §§ 1.17(a)(1)-(5) (extension fees pursuant to § 1.136(a)).
- ☐ 37 C.F.R. 1.17 (application processing fees)

NOTE: "...A written request may be submitted in an application that is an authorization to treat any concurrent or future reply, requiring a petition for an extension of time under this paragraph for its timely submission, as incorporating a petition for extension of time for the appropriate length of time. An authorization to charge all required fees, fees under § 1.17, or all required extension of time fees will be treated as a constructive petition for an extension of time in any concurrent or future reply requiring a petition for an extension of time under this paragraph for its timely submission. Submission of the fee set forth in § 1.17(a) will also be treated as a constructive petition for an extension of time in any concurrent reply requiring a petition for an extension of time under this paragraph for its timely submission." 37 C.F.R. § 1.136(a)(3).

- ☐ 37 C.F.R. 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 C.F.R. 1.311(b))

NOTE: Where an authorization to charge the issue fee to a deposit account has been filed before the mailing of a Notice of Allowance, the issue fee will be automatically charged to the deposit account at the time of mailing the notice of allowance. 37 CFR 1.311(b).

(Application Transmittal [4-1]—page 8 of 10)



NOTE: 37 CFR 1.28(b) requires "Notification of any change in status resulting in loss of entitlement to small entity status must be filed in the application . . . prior to paying, or at the time of paying, . . . issue fee." From the wording of 37 CFR 1.28(b), (a) notification of change of status must be made even if the fee is paid as "other than a small entity" and (b) no notification is required if the change is to another small entity.

#### 16. Instructions as to Overpayment

NOTE: ". . . Amounts of twenty-five dollars or less will not be returned unless specifically requested within a reasonable time, nor will the payer be notified of such amounts; amounts over twenty-five dollars may be returned by check or, if requested, by credit to a deposit account." 37 C.F.R. § 1.26(a).

☒ Credit Account No. 19-0737

☐ Refund



SIGNATURE OF PRACTITIONER

Reg. No. 30,587

Ansel M. Schwartz

(type or print name of attorney)

Tel. No. (412) 621-9222

One Sterling Plaza

P.O. Address

201 N. Craig Street, Suite 304  
Pittsburgh, PA 15213

Customer No.

☒ **Incorporation by reference of added pages**

*(check the following item if the application in this transmittal claims the benefit of prior U.S. application(s) (including an international application entering the U.S. stage as a continuation, divisional or C-I-P application) and complete and attach the ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED)*

- ☐ Plus Added Pages for New Application Transmittal Where Benefit of Prior U.S. Application(s) Claimed

Number of pages added \_\_\_\_\_

- ☐ Plus Added Pages for Papers Referred to in Item 4 Above

Number of pages added \_\_\_\_\_

- ☐ Plus added pages deleting names of inventor(s) named in prior application(s) who is/are no longer inventor(s) of the subject matter claimed in this application.

Number of pages added \_\_\_\_\_

- ☒ Plus "Assignment Cover Letter Accompanying New Application"

Number of pages added \_\_\_\_\_ 4

☐ **Statement Where No Further Pages Added**

*(if no further pages form a part of this Transmittal, then end this Transmittal with this page and check the following item)*

- ☐ This transmittal ends with this page.

# VERY WIDE MEMORY TDM SWITCHING SYSTEM

## FIELD OF THE INVENTION

The present invention is related to time division multiplexed switches. More specifically, the present invention  
5 relates to time division multiplexing of switches where a memory bus width is independent of the width of any packet.

## BACKGROUND OF THE INVENTION

Time division multiplexing is one technique used to implement a switching system. Consider a switch fabric with N  
10 input ports that each receive packets at rate R and N output ports that each transmit packets at rate R, as shown in figure 1. For a shared memory TDM switching system, a single memory bus is required that has an aggregate bandwidth of  $2 \times N \times R$ . The arriving packets are aggregated and written to the memory. Once written to memory, the  
15 packets are read out of the memory and transmitted on the output ports.

This system operates correctly and in a non-blocking fashion provided that the shared memory has enough bandwidth to service all of the input and output ports. Memory bandwidth can be  
20 increased by increasing the speed and width of the memory bus. Current memory bus speeds are technology limited to roughly 300MHz, using microprocessor synchronous cache memories. To further increase memory bandwidth, the memory bus must be made wider.

Consider an example TDM switching system with 4 inputs and 4 outputs, as shown in figure 2. The input and output ports consist of 1-bit wide data paths and run at a single fixed clock rate that is the same for all ports and the memory bus. Assume  
5 that all packets are 8-bits in length. The fabric can be implemented with an 8-bit wide TDM memory bus. Over a period of 8 clock cycles, each input port is allocated one clock cycle to write a packet (8-bits) to memory and each output port is allocated one clock cycle to read a packet from memory.

There are several issues that complicate the design of TDM switching systems in practice. Depending on the application of the switching system, packets usually vary in size. Variable sized packets reduce the performance of TDM systems due to packet fragmentation on the memory bus. If a packet doesn't utilize an integral number of memory cycles, memory bandwidth is wasted on memory cycles that read or write data that is less than the memory bus width. Typically, TDM systems are implemented with a memory bandwidth greater than  $2 \times N \times R$  to compensate for inefficiencies due to fragmentation.

Fragmentation issues become significant as the memory width approaches, or exceeds, the minimum sized data packet. Consider a system with a memory bus width that is equal to twice the minimum packet length. During a period in which all received packets have length equal to the minimum packet length, the memory  
25 system bandwidth is reduced by 50% (or is 50% efficient), since all

packets written to memory utilize only half of the memory bus data bits.

Due to packet fragmentation on the memory bus, typical TDM switching systems utilize bus widths that are at most as wide  
5 as a minimum length packet.

The total bandwidth of a shared memory TDM switching system is limited by the bandwidth of the memory bus. Memory bus bandwidth is determined by its speed (clock rate) and its width (number of bits). Given that memory speeds are fixed by the  
10 technology of available memory components, then the total bandwidth of TDM switches is limited by the minimum packet size.

#### SUMMARY OF THE INVENTION

The present invention pertains to a switching system. The system comprises I input port mechanisms which receive packets from  
15 a communication line having a width, where I is greater than or equal to 1 and is an integer. The system comprises O output port mechanisms which send packets to a communication line having a width, where O is greater than or equal to 1 and is an integer. The system comprises a carrier mechanism along which packets  
20 travel. The carrier mechanism has a width wider than the width of the input and output communication lines. The carrier mechanism is connected to each input port mechanism and each output port mechanism. The system comprises a memory mechanism in which

packets are stored. The memory mechanism is connected to the carrier mechanism. The system comprises a mechanism for providing packets to the memory mechanism through the carrier mechanism from the input port mechanisms. The providing mechanism is able to transfer packets or portions of packets whose total width equals the width of the carrier mechanism in each transfer cycle to the memory mechanism.

The present invention pertains to a switching system for packets. The system comprises a central resource having a width and an overall bandwidth and input port mechanisms and output port mechanisms for receiving or sending packets, respectively. The central resource is partitioned via time slots that are allocated to the input and output port mechanisms. The central resource width is independent of any packet width and the overall bandwidth can grow without bound. The system comprises a memory mechanism for storing packets. The memory mechanism is connected to the central resource.

The present invention pertains to a switching system. The system comprises a time division multiplex bus. The system comprises a memory mechanism connected to the bus which is accessed via time division multiplexing of the bus. The system comprises a mechanism for reading and writing data of packets to the memory mechanism through the bus without knowledge of the packet boundaries of the data.

The present invention pertains to a switching system. The system comprises a time division multiplex carrier mechanism having a width. The system comprises a memory mechanism connected to the carrier mechanism. The system comprises an input mechanism  
5 having a width for providing data of packets to the memory mechanism so the data of the packets fills the width of the bus via time division multiplexing. The bus width is a positive non-integer multiple of the packet width. The system comprises an output mechanism having a width for providing data of packets from  
10 the memory mechanism.

The present invention pertains to a method for switching packets from input mechanisms to output mechanisms, each having a width. The method comprises the steps of receiving a first packet and at least a second packet at a switch mechanism. The method  
15 comprises the steps of transferring data of the first packet and the second packet to a memory mechanism via time division multiplexing of a bus having a width so data from the packets fills a predetermined portion of the width of the bus. The bus width is not equal to the input and output mechanism widths.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings, the preferred embodiment of the invention and preferred methods of practicing the invention are illustrated in which:

5           Figure 1 is a schematic representation of a prior art time division multiplexed switch.

Figure 2 is a schematic representation of a prior art time division multiplexed switch with 4 inputs and 4 outputs.

10           Figure 3 is a schematic representation of a switching system of the present invention.

Figure 4 is a schematic representation of a switching system of the present invention.

Figure 5 is a schematic representation of a code word.

15           Figure 6 is a schematic representation of a data path of a four port path.

Figure 7 is a schematic representation of a memory bus divided in a TDM fashion.

Figure 8 is a schematic representation of a memory.



Figure 9 is a schematic representation of five FIFO queues.

#### DETAILED DESCRIPTION

Referring now to the drawings wherein like reference  
5 numerals refer to similar or identical parts throughout the several  
views, and more specifically to figures 3 and 4 thereof, there is  
shown a switching system 10. The system 10 comprises I input port  
mechanisms 12 having a width which receive packets from a  
communication line 16, where I is greater than or equal to 1 and is  
10 an integer. Preferably, an input port mechanism 12 includes an  
input port. The system 10 comprises O output port mechanisms 14  
having a width which send packets to a communication line 16, where  
O is greater than or equal to 1 and is an integer. Preferably, an  
output port mechanism 14 includes an output port. The system 10  
15 comprises a carrier mechanism 20 along which packets travel. The  
carrier mechanism 20 has a width wider than the width of the input  
and output mechanisms. The carrier mechanism 20 is connected to  
each input port mechanism and each output port mechanism. The  
system 10 comprises a memory mechanism 22 in which packets are  
20 stored. The memory mechanism 22 is connected to the carrier  
mechanism 20. The system 10 comprises a mechanism for providing  
packets to the memory mechanism 22 though the carrier mechanism 20  
from the input port mechanisms 12. The providing mechanism 20 is  
able to transfer packets or portions of packets whose total size

equals the width of the carrier mechanism 20 in each transfer cycle to the memory mechanism 22.

Preferably, the width of the carrier mechanism 20 is independent of the width of any of the input and output mechanisms.

5 The input port mechanism preferably receives variable sized packets. Preferably, the output port mechanism sends variable sized packets to the communication line 16. The communication line 16 can be an ATM network.

10 Preferably, the providing mechanism 20 also provides packets from the memory mechanism 22 to the output port mechanisms 14 through the carrier mechanism 20. The providing mechanism 20 is able to transfer packets or portions of packets whose total size equals the width of the carrier mechanism 20 in each transfer cycle from the memory mechanism 22.

15 The providing mechanism 20 preferably includes an input stage of queue groups 24 connected to the carrier mechanism 20 and the input port mechanisms 12 for storing packets received by the input port mechanisms 12, and an output stage of queue groups 26 connected to the providing mechanism 20 and the output port mechanisms 14 for storing packets to be sent out the output port mechanisms 14, with each queue group corresponding to a packet. Preferably, the providing mechanism 20 includes a classifying mechanism 28 which places a packet which is received by the input port mechanism into a corresponding input stage queue group, said

20

classifying mechanism 28 connected to the input port mechanisms 12 and the input queue groups 24. The providing mechanism 20 preferably includes a processing mechanism 30 which places a packet in an output stage queue group into a corresponding output port mechanism, said processing mechanism 30 connected to the output port mechanisms 14 and the output stage queue groups 26.

Preferably, the classifying mechanism 28 includes a first write finite state machine 32 for writing packets into a corresponding input queue, the providing mechanism 20 includes a second write finite state machine 34 for writing packets from an input stage queue group into the memory mechanism 22, and a first read finite state machine 36 for reading packets from the memory mechanism 22 to an output stage queue group, and the processing mechanism 30 includes a second read finite state machine 38 for reading a packet from the output stage queue group to the network.

The memory mechanism 22 preferably includes a shared memory 40. Preferably, packets or portions of packets travel on the carrier mechanism 20 based on time division multiplexing. The carrier mechanism 20 preferably includes a bus 42. Preferably, the first read finite state machine 36 only transfers data of packets of an input stage queue group to the bus 42 when the input stage queue group contains at least one cache-line of data.

The present invention pertains to a switching system 10 for packets. The system 10 comprises a central resource 44 having

a width and an overall bandwidth and input port mechanisms 12 and output port mechanisms 14 for receiving or sending packets, respectively. The central resource 44 is partitioned via time slots that are allocated to the input and output port mechanisms 14. The central resource 44 width is independent of any input port or output port mechanisms width and the overall bandwidth can grow without bound. The system 10 comprises a memory mechanism 22 for storing packets. The memory mechanism 22 is connected to the central resource 44.

Preferably, the central resource 44 includes a memory bus 42. The central resource 44 preferably includes queue groups in which packets are classified, and the packets are read from and written into the memory mechanism 22 from the queue groups.

The present invention pertains to a switching system 10. The system 10 comprises a time division multiplex bus 42. The system 10 comprises a memory mechanism 22 connected to the bus 42 which is accessed via time division multiplexing of the bus 42. The system 10 comprises a mechanism for reading and writing data of packets to the memory mechanism 22 through the bus 42 without knowledge of the packet boundaries of the data.

The present invention pertains to a switching system 10. The system 10 comprises a time division multiplex carrier mechanism 20 having a width. The system 10 comprises a memory mechanism 22 connected to the carrier mechanism 20. The system 10 comprises a

mechanism for providing data of packets to the memory mechanism 22 from an input port mechanism having a width so the data of the packets fills the width of the bus 42 via time division multiplexing. The system 10 comprises a mechanism for providing  
5 data of packets from the memory mechanism 22 to an output port mechanism having a width. The bus 42 width is a positive non-integer multiple of the input and output port mechanism widths.

The present invention pertains to a method for switching packets. The method comprises the steps of receiving a first  
10 packet and at least a second packet at a switch mechanism having a width. The method comprises the steps of transferring data of the first packet and the second packet to a memory mechanism 22 via time division multiplexing of a bus 42 having a width so data from the packets fills a predetermined portion of the width of the bus  
15 42. The bus 42 width is not equal to the input port mechanism width.

The bus 42 width preferably is a positive multiple of the input port mechanism width and can be a non-integer multiple. Preferably, the transferring step includes the steps of placing the  
20 first packet and at least the second packet in an input stage queue group; and transferring data in the input stage queue group during an allocated time slot on the bus 42 to the memory mechanism 22 so the data fills the predetermined portion of the width of the bus 42.

Before the transferring data step, there is preferably the step of determining that the input queue group has at least enough data to fill the predetermined portion of the width of the bus 42 before data is transferred to the bus 42. Preferably, 5 before the transferring data step, there is the step of determining that the input stage queue group has at least one-cache line of data.

10 In the operation of the invention, the system 10, the memory width limitation of typical TDM switching systems is removed by classifying packets into input stage queue groups 24 and then reading and writing data from the input stage queue groups 24 to memory. The memory width is independent of the minimum packet size and the overall bandwidth of the TDM switching system 10 can grow without bounds.

15 The packets that arrive on the input ports of the switching system 10 are classified into a fixed number of queue groups 24. A queue is implemented for each group in three stages:

1. The input stage: The tail of the queue is implemented in the switch fabric by a Write Finite State Machine (W-FSM).

20 2. The memory stage: The middle of the queue is implemented in the shared memory.

3. The output stage: The head of the queue is implemented in the switch fabric by a Read Finite State Machine (R-FSM).

5 Reads and writes to shared memory are implemented on data in the queue group and are performed without knowledge of the packet boundaries of the data in the queue. Access to the shared memory is allocated to the Read and Write FSMs via time division multiplexing of the shared memory bus 42. The width of the shared memory bus 42 is called a cache-line.

10 The W-FSM is implemented as follows:

W-FSM Queue Fill Process:

Packets arrive from the input ports, are categorized, and are added to the tail of an input stage W-FSM group queue.

15 W-FSM Queue Drain Process:

At (allocated time slot for TDM bus)

If (W-FSM contains at least one cache-line of data)  
Write cache-line at head of W-FSM queue to tail of  
shared memory group queue

20 The R-FSM is implemented as follows:

R-FSM Queue Fill Process

At (allocated time slot for TDM bus)

If (R-FSM contains no data)

If (shared memory contains data for this group  
queue)

5                   Read cache-line at head of shared memory  
                    queue to tail of R-FSM queue

else (shared memory does NOT contains data for  
this group queue)

10                   Read any data from head of W-FSM queue  
                    (up to a cache-line) to tail of R-FSM  
                    queue

#### R-FSM Queue Drain Process

15                   Packets are removed from the head of the output stage R-  
                    FSM queue, are processed, and transmitted to an output  
                    port.

20                   More specifically, a cell or a packet arrives at an input  
port of the switch 45. A first write finite state machine 32  
classifies the packet into a queue group 24. As other packets  
arrive at input ports of the switch 45, they are also classified by  
the first write finite state machine 32 into their corresponding  
queue group 24. Once classified into a queue group, they are  
appended to the end of the corresponding input stage queue group.  
This classifying and filling of cells received at input ports of  
the switch 45 continues over time. In regard to a specific input  
25 queue group 24, as a packet is categorized and classified to it,



the packet is added to the tail of the corresponding input queue group 24.

A second write finite state machine 34 corresponding with the input stage queue group 24 keeps track of the number of packets  
5 in the input stage queue group 24. When there are enough packets in the input stage queue group 24 for the data in the input stage queue group 24 to fill the cache line of the memory 40 bus, the second write finite state machine 34 waits for the input queue group's 24 allocated time slot on the bus to arrive. Where the  
10 second write finite state machine 34 before did not release any data from the input stage queue group 24 to the bus when the allocated slot arrived because there was not enough data in the input stage queue group 24 to fill a cache line, now that there is enough data to fill the cache-line, the second write finite state  
15 machine 34 sends enough data from the input stage queue group 24 to fill a cache-line on the bus during the allocated slot of the input queue group 24. The allocated slot is of long enough duration to allow a cache-line of data to be sent onto the bus from the input stage queue group 24. As the cache line of data from the input  
20 stage queue group 24 is sent on the bus, the data that remains in the input stage queue group 24 is moved up to the head of the input stage queue group 24. Furthermore, the data that is moved up to the head of the input stage queue group 24 makes room for additional packets and thus data to be placed into the input stage  
25 queue group 24. There can be times when data is being sent onto the bus from the input stage queue group 24 and at the same time

cells are being placed onto the tail of the input stage queue group 24.

Depending on the size of the cache-line, the data that is sent over the bus can be other than an integer multiple of packets in the input queue group 24 have. For exemplary purposes, the cache-line is of a width that a portion of a packet remains in the input stage queue group 24 after the cache-line of data has been sent onto the bus to the memory 40. The second write finite state machine 34 is ignorant of cell or packet boundaries and is only concerned with filling the cache-line with data whatever the result to the integrity of the cell or packet is. Thus, a cell or packet is broken up to accommodate the constraint that the data fills the cache-line during the allocated slot.

When the cache-line of data arrives at the shared memory 40 from the bus, a controller 47 stores the cache-line of data in the shared memory 40 and records the address in the shared memory 40 where the cache-line is stored as well as the order of that cache-line from the input stage queue group 24 and the input stage queue group 24 from which the cache-line arrives. Over time, cache-lines of data from different input stage queue groups 24 will be stored in the shared memory 40 by the controller 47, as well as the next cache-line sent by the input stage queue group 24 to the shared memory 40. The controller 47 keeps track of the addresses where the cache-lines from an input stage queue group 24 are stored. Subsequent cache-lines from an input stage queue group 24

do not necessarily need to be stored in the same address or even in two addresses next to each other, even though, for instance, the first cache-line from the input stage queue group 24 might have the first part of a cell and the second cache-line from the input stage queue group 24 might have the second part of the cell. This is not necessary as long as the controller 47 knows where the cache-lines from the input stage queue group 24 are located and the order in which the cache-lines arrived at the shared memory 40.

When a packet is to be transmitted from an output port, a first read finite state machine 36 corresponding to an output stage queue group 26 waits for the output stage queue group's 26 allocated time slot on the bus to arrive. The first read finite state machine 36 keeps track of data in the shared memory 40 which are to be read into the output stage queue group 26. The first read finite state machine 36 is in communication with the controller 47 and the write finite state machines so it knows which data is to go to the output stage queue group 26 to which it corresponds. When the allocated time slot arrives for the output stage queue group 26, the cache line whose turn it is next to be read from the shared memory 40 is read by the first read finite state machine 36 to the tail of the output stage queue group 26. When the next allocated time slot arrives for the output stage queue group 26, the cache-line in the shared memory 40 for the output stage queue group 26 is read into the output stage queue group 26 by the first read finite state machine 36. The first read finite state machine 36 knows from which address to read a

cache-line by communicating with the controller 47. Since cache-lines are read in order, and placed on the tail of the output stage queue group 26, any cells that have been broken up during the writing stage into the shared memory 40 are reunited when the  
5 separate cache-lines are reunited in the output stage queue group 26. If there is no data in the shared memory 40 when the allocated time slot for the output stage queue group arrives, then the read finite state machine will read data up to the cache-line directly from an input stage queue group 24 whose data is to ultimately go  
10 into the output stage queue group 26.

A second read finite state machine 38 keeps track of the packets in the output stage queue groups. Only when a predetermined amount of packets, are formed in the output stage queue group 26 will the second read finite state machine 38 read  
15 packets up to a predetermined amount from the output stage queue group 26 and send them to an output port which sends them onto the network.

Since all reads and writes to memory contain a full cache-line of data, memory bus 42 efficiency is 100%. Small  
20 packets do not cause fragmentation of data on the memory bus 42. Furthermore, the memory bus width can grow without bounds and is not limited by packet size.

The queue group model can be used to implement arbitrary queuing structures. To implement output queues, one queue group is

allocated for each output port. A queue group consists of the input stage queue group, some number of cache-lines stored in the shared memory, and the output stage queue group. The packet classifier examines each packet on input, and classifies the packet  
5 into the appropriate output queue. The packets are routed to the input stage queue group that corresponds to that output queue. The output queues 28 are queued to/from memory using the W-FSMs and R-FSMs. After the R-FSM, the packets are queued immediately to an output port.

10 Input queues are implemented using a trivial packet classifier, by associating one queue group 24 for each input port.

A priority-based scheme can be implemented as follows. A queue group is defined for each of several priority levels. On input, a packet is classified into one of the priority queue  
15 groups. The queue groups are queued to memory using the W-FSMs and R-FSMs. After the R-FSM, the packets are processed to determine their output ports and transmitted from the fabric.

#### Example

20 A four input port, four output port packet switch is implemented using the system 10. The system is globally synchronous and operates on a 20MHz clock. The four inputs operate at 8-bits wide and implement four 160 Mbps interfaces. The packets are

delineated using a start of packet (SOP) and end of packet (EOP) code word, as shown in figure 5.

The example assumes an output queued switch. The packets that arrive on the input ports of the switching system 10 are classified into four queue groups, one for each output port. Referring to figure 4, an output queue is implemented for each group in three sub-systems:

1. The tail is implemented in the switch fabric by a Write Finite State Machine (W-FSM).
2. The middle is implemented in the shared memory.
3. The head is implemented in the switch fabric by a Read Finite State Machine (R-FSM).

Reads and writes to shared memory are implemented on data in the queue group and are performed without knowledge of the packet boundaries of the data in the queue. Access to the shared memory is allocated to the Read and Write FSMs via time division multiplexing of the shared memory bus. The width of the shared memory bus is called a cache-line.

The head and tail of the queue group located in the input stage and output stage of the invention are implemented directly in shift registers 51. The shift registers 51 are as wide as the

incoming data interfaces and as long as the memory cacheline. The data path for the four port switch is shown in figure 6.

The cacheline is 64-bits long and contains eight bytes. Data from each port is shifted into an 8-register deep, 8-bit wide cacheline shift register. Not shown is a synchronization shift register prior to the shift register that is also an 8-deep 8-bit register. The memory bus is divided in a TDM (time division multiplex) fashion into eight time slots 53, one for each input and output port, as shown in figure 7. Since the example switch implements output queues, the output stage queues are always drained at the same rate, and therefore always use the same time slot on the bus. Since arriving packets can be destined for any output port, the input stage queues can be filled at any arbitrary rate. The input stage groups are allocated the input bus time slots as they are needed. Since the total input rate does not exceed four time slots, it is sufficient to let the input stages arbitrate for the four input stage time slots.

The synchronization register is used to guarantee that no data is lost. Data typically is not stored in the synchronization register. All arriving packets are written directly into the cacheline register. If the cacheline register fills prior to its time slot on the TDM bus, then the synchronization register begins storing data. Once the cacheline register is emptied, the data from the synchronization register is pushed into the cacheline register. If the cacheline register is still filled, it immediate

arbitrates for the next input bus cycle. Only filled cacheline registers arbitrate for bus cycles.

The head and tail of the queue groups (the input and output stages of the invention) are implemented directly with FIFO queues in hardware, as shown in figure 8. The middle of the queue groups are implemented in memory and are stored as cachelines. In this example, a 256 deep memory is used that can read and write an entire cacheline on a single clock cycle. Zero turn around memories (ZBT) are assumed, so that writes may follow reads directly.

Five FIFO queues 57, as shown in figure 9, are required to implement the middle of the queue groups in memory. Four of the queues contain addresses of the cachelines that are contained in the memory, one for each of the queue groups. The fifth FIFO queue, the freelist, contains addresses of cachelines that are empty. At reset the freelist FIFO is initialized to contain all addresses of the cachelines that are contained in the memory and the channel address FIFOs are empty.

The datapath operates in one of eight states:

· Ain, Bin, Cin, Din, Aout, Bout, Cout, Dout

The states are determined by the timeslot indicated by the memory frame given above. In this example, the four output queue groups use their identified state. The input stages request



to use any of the input states. An arbitrator is used to identify which input stage uses each appropriate input time slot. All input (output) states operate in the same manner. Consider input state Ain, an input state in which input stage A has successfully  
5 arbitrated for the input state. At the first clock cycle in the TDM frame Ain operates as follows:

At (allocated time slot for TDM bus)

If (A cacheline register is full)

Use address at head of FreeList to drive memory bus

Write data contained in channel A cacheline  
10 register to memory

Pop FreeList memory address

Push FreeList memory address to tail of channel A  
address FIFO

15 If the FreeList address FIFO is empty, then the data located in the channel A cacheline register is dropped. Care must be taken to identify the dropped packets in channel A. The other input channels operate in a similar fashion at their identified memory time slot.

20 Consider output state Aout. At the fifth clock cycle in the TDM frame Aout operates as follows:

At (allocated time slot for TDM bus)

If (R-FSM contains no data)

If (shared memory contains data for this group  
queue)

Read cache-line at head of shared memory queue  
to tail of R-FSM queue

5 else (shared memory does NOT contains data for this  
group queue)

Read any data from head of W-FSM queue (up to  
a cache-line) to tail of R-FSM queue

10 In regard to the R-FSM queue drain process, packets are  
removed from the head of the R-FSM queue, are processed, and  
transmitted to an output port.

15 Since all reads and writes to memory contain a full  
cache-line of data, memory bus efficiency is 100%. Small packets do  
not cause fragmentation of data on the memory bus. Furthermore,  
the memory bus width can grow without bounds and is not limited by  
packet size.

20 Although the invention has been described in detail in  
the foregoing embodiments for the purpose of illustration, it is to  
be understood that such detail is solely for that purpose and that  
variations can be made therein by those skilled in the art without  
departing from the spirit and scope of the invention except as it  
may be described by the following claims.

WHAT IS CLAIMED IS:

1. A switching system comprising:

I input port mechanisms with a width, which receive packets from a communication line, where I is greater than or equal to 1 and is an integer;

O output port mechanisms with a width, which send packets to a communication line, where O is greater than or equal to 1 and is an integer;

a carrier mechanism along which packets travel, said carrier mechanism having a width wider than the width of the input and output port mechanisms, said carrier mechanism connected to each input port mechanism and each output port mechanism;

a memory mechanism in which packets are stored, said memory mechanism connected to the carrier mechanism; and

a mechanism for providing packets to the memory mechanism through the carrier mechanism from the input port mechanisms, said providing mechanism able to transfer packets or portions of packets whose total width equals the width of the carrier mechanism in each transfer cycle to the memory mechanism.

2. A switching system as described in Claim 1 wherein the width of the carrier mechanism is independent of the width of any packet.

3. A system as described in Claim 2 wherein the input port mechanism receives variable sized packets.

4. A switching system as described in Claim 3 wherein the output port mechanism sends variable sized packets to the communication line.

5. A system as described in Claim 4 wherein the providing mechanism also provides packets from the memory mechanism to the output port mechanisms through the carrier mechanism, said providing mechanism able to transfer packets or portions of packets whose total data equals the width of the carrier mechanism in each transfer cycle from the memory mechanism.

6. A system as described in Claim 5 wherein the providing mechanism includes input stage queue groups connected to the carrier mechanism and the input port mechanisms for storing packets received by the input port mechanisms, and output stage queue groups connected to the providing mechanism and the output port mechanisms for storing packets to be sent out the output port mechanisms.

7. A system as described in Claim 6 wherein the providing mechanism includes a classifying mechanism which places a packet which is received by the input port mechanism into a corresponding queue group, said classifying mechanism connected to the input port mechanisms and the input stage queue groups.

8. A system as described in Claim 7 wherein the providing mechanism includes a processing mechanism which places a packet in an output stage queue group into a corresponding output port mechanism, said processing mechanism connected to the output port mechanisms and the output stage queue groups.

9. A system as described in Claim 8 wherein the classifying mechanism includes a first write finite state machine for writing packets into a corresponding input stage queue, the providing mechanism includes a second write finite state machine for writing packets from an input stage queue group into the memory mechanism, and a first read finite state machine for reading packets from the memory mechanism to an output stage queue group, and the processing mechanism includes a second read finite state machine for reading a packet from the output stage queue group to the network.

10. A system as described in Claim 9 wherein the memory mechanism includes a shared memory.

11. A system as described in Claim 10 wherein packets or portions of packets travel on the carrier mechanism based on time division multiplexing.

12. A system as described in Claim 11 wherein the carrier mechanism includes a bus.

13. A system as described in Claim 12 wherein the first read finite state machine only transfers data of packets of an input stage queue group to the bus when the input queue group contains at least one cache-line of data.

14. A system as described in Claim 13 wherein the communication line is an ATM network.

15. A switching system for packets comprising:

a central resource having a width and an overall bandwidth and input port mechanisms and output port mechanisms each having widths for receiving or sending packets, respectively, said central resource partitioned via time slots that are allocated to the input and output port mechanisms, said central resource width independent of any input or output port mechanisms width and the overall bandwidth can grow without bound; and

a memory mechanism for storing packets, said memory mechanism connected to the central resource.

16. A switching system as described in Claim 15 wherein the central resource includes a memory bus.

17. A switching system as described in Claim 16 wherein the central resource includes queue groups in which packets are classified, and the packets are read from and written into the memory mechanism from the queue groups.

18. A switching system comprising:

a time division multiplex bus;

a memory mechanism connected to the bus which is accessed via time division multiplexing of the bus; and

a mechanism for reading and writing data of packets to the memory mechanism through the bus without knowledge of the packet boundaries of the data.

19. A switching system comprising:

a time division multiplex carrier mechanism having a width;

a memory mechanism connected to the carrier mechanism;  
and

an input stage mechanism having a width for providing data of packets to the memory mechanism so the data of the packets fills the width of the bus via time division multiplexing, said bus width a positive non-integer multiple of the input stage mechanism width.

20. A method for switching packets comprising the steps of:

receiving a first packet and at least a second packet at a switch mechanism; and

transferring data of the first packet and the second packet to a memory mechanism via time division multiplexing of a bus having a width so data from the packets fills a predetermined portion of the width of the bus, said bus width not necessarily a function of the data contained in any packet.

21. A method as described in Claim 20 wherein the bus width is a positive non-integer multiple of the packet size.

22. A method as described in Claim 21 wherein the transferring step includes the steps of placing the first packet and at least the second packet in an input stage queue group; and transferring data in the input stage queue group during an allocated time slot on the bus to the memory mechanism so the data fills the predetermined portion of the width of the bus.



23. A method as described in Claim 22 wherein before the transferring data step there is the step of determining that the input stage queue group has at least enough data to fill the predetermined portion of the width of the bus before data is transferred to the bus.

24. A method as described in Claim 23 wherein before the transferring data step, there is the step of determining that the input stage queue group has at least one-cache line of data.

ABSTRACT OF THE DISCLOSURE

VERY WIDE MEMORY TDM SWITCHING SYSTEM

A switching system. The system includes I input port mechanisms which receive packets from a communication line and have a width, where I is greater than or equal to 1 and is an integer. The system includes O output port mechanisms which send packets to a communication line and have a width, where O is greater than or equal to 1 and is an integer. The system includes a carrier mechanism along which packets travel. The carrier mechanism has a width wider than the width of the input and output port mechanisms. The carrier mechanism is connected to each input port mechanism and each output port mechanism. The system includes a memory mechanism in which packets are stored. The memory mechanism is connected to the carrier mechanism. The system includes a mechanism for providing packets to the memory mechanism through the carrier mechanism from the input port mechanisms. The providing mechanism is able to transfer packets or portions of packets whose total width equals the width of the carrier mechanism in each transfer cycle to the memory mechanism. A switching system for packets. A method for switching packets. The method includes the steps of receiving a first packet and at least a second packet at a switch mechanism. The method includes the steps of transferring data of the first packet and the second packet to a memory mechanism via time division multiplexing of a bus having a width so data from the

[illegible]

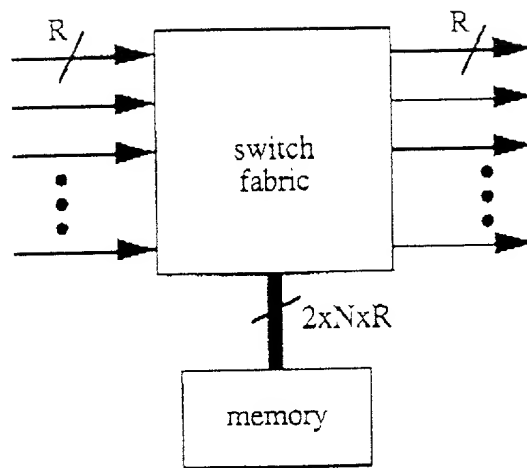


FIG 1

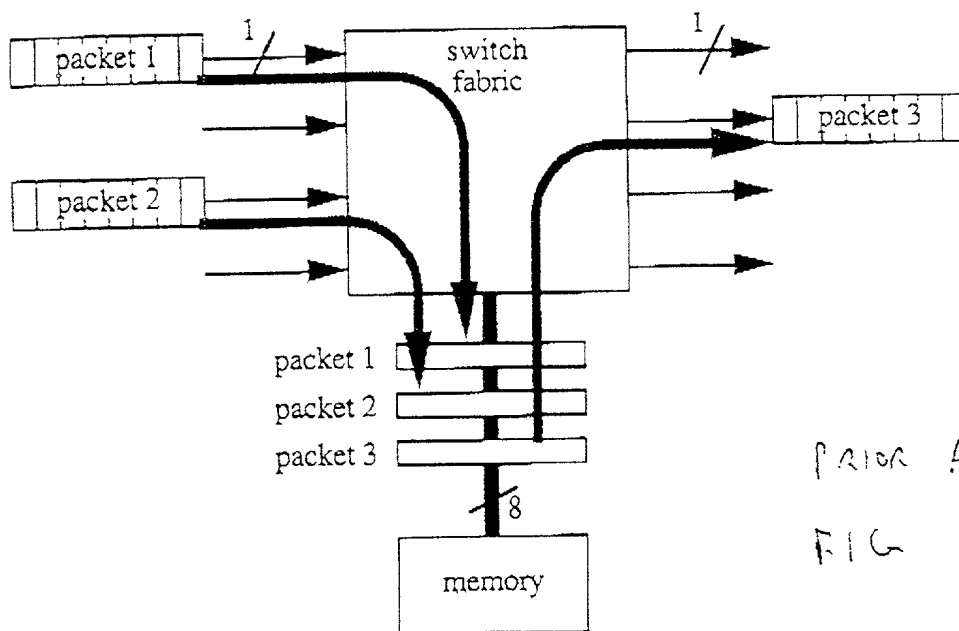


FIG 2

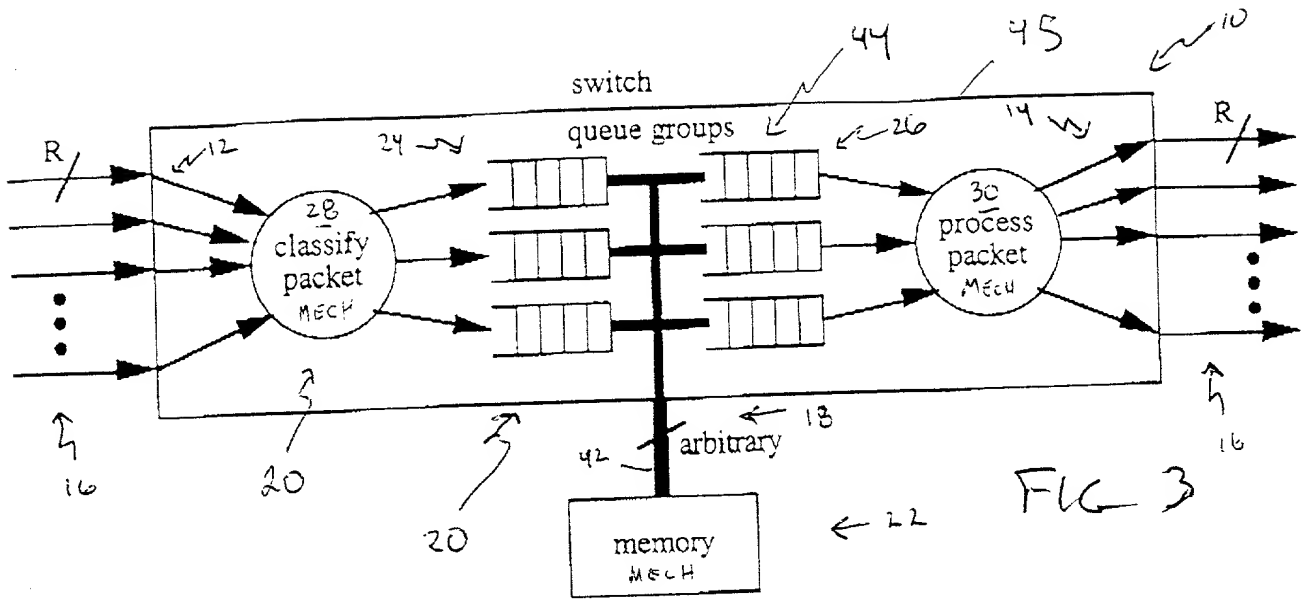


FIG 3

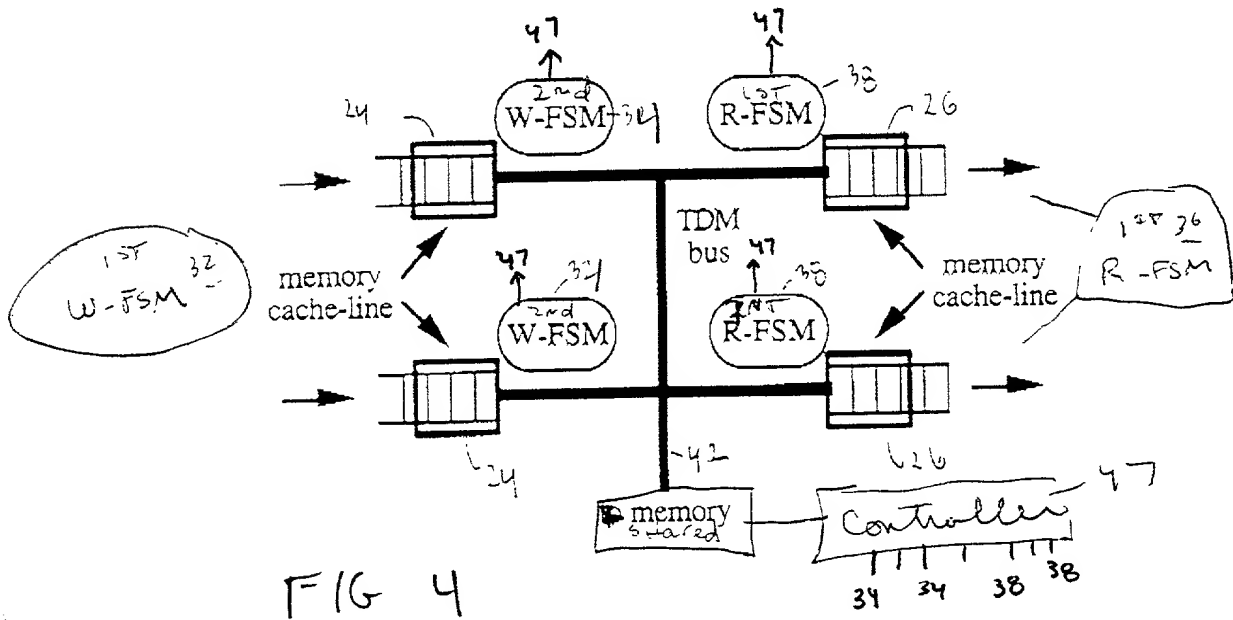


FIG 4

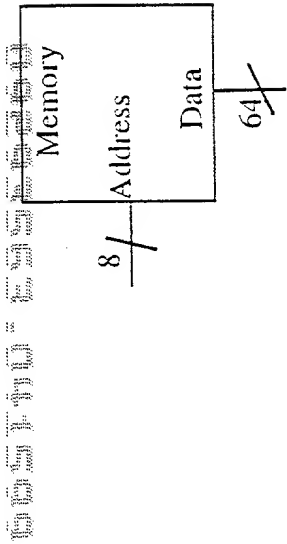


FIG. 8

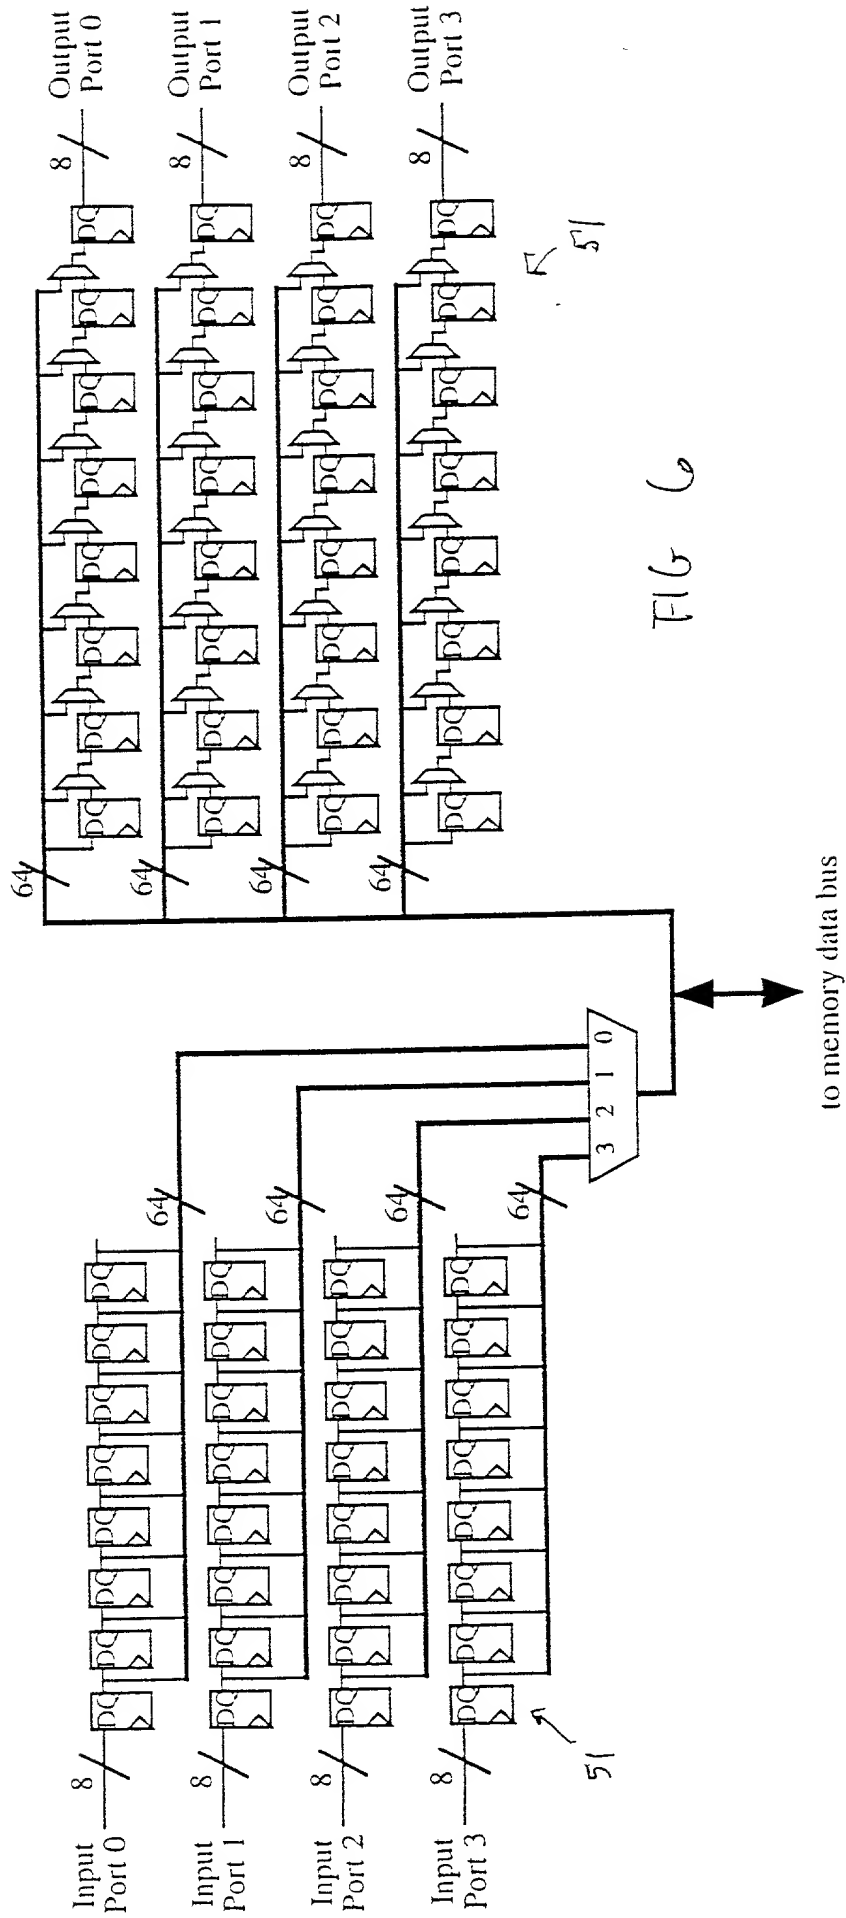


FIG. 6

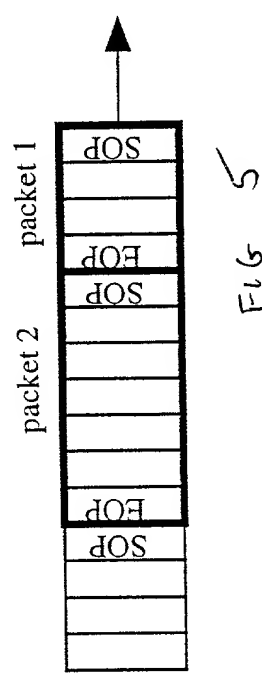
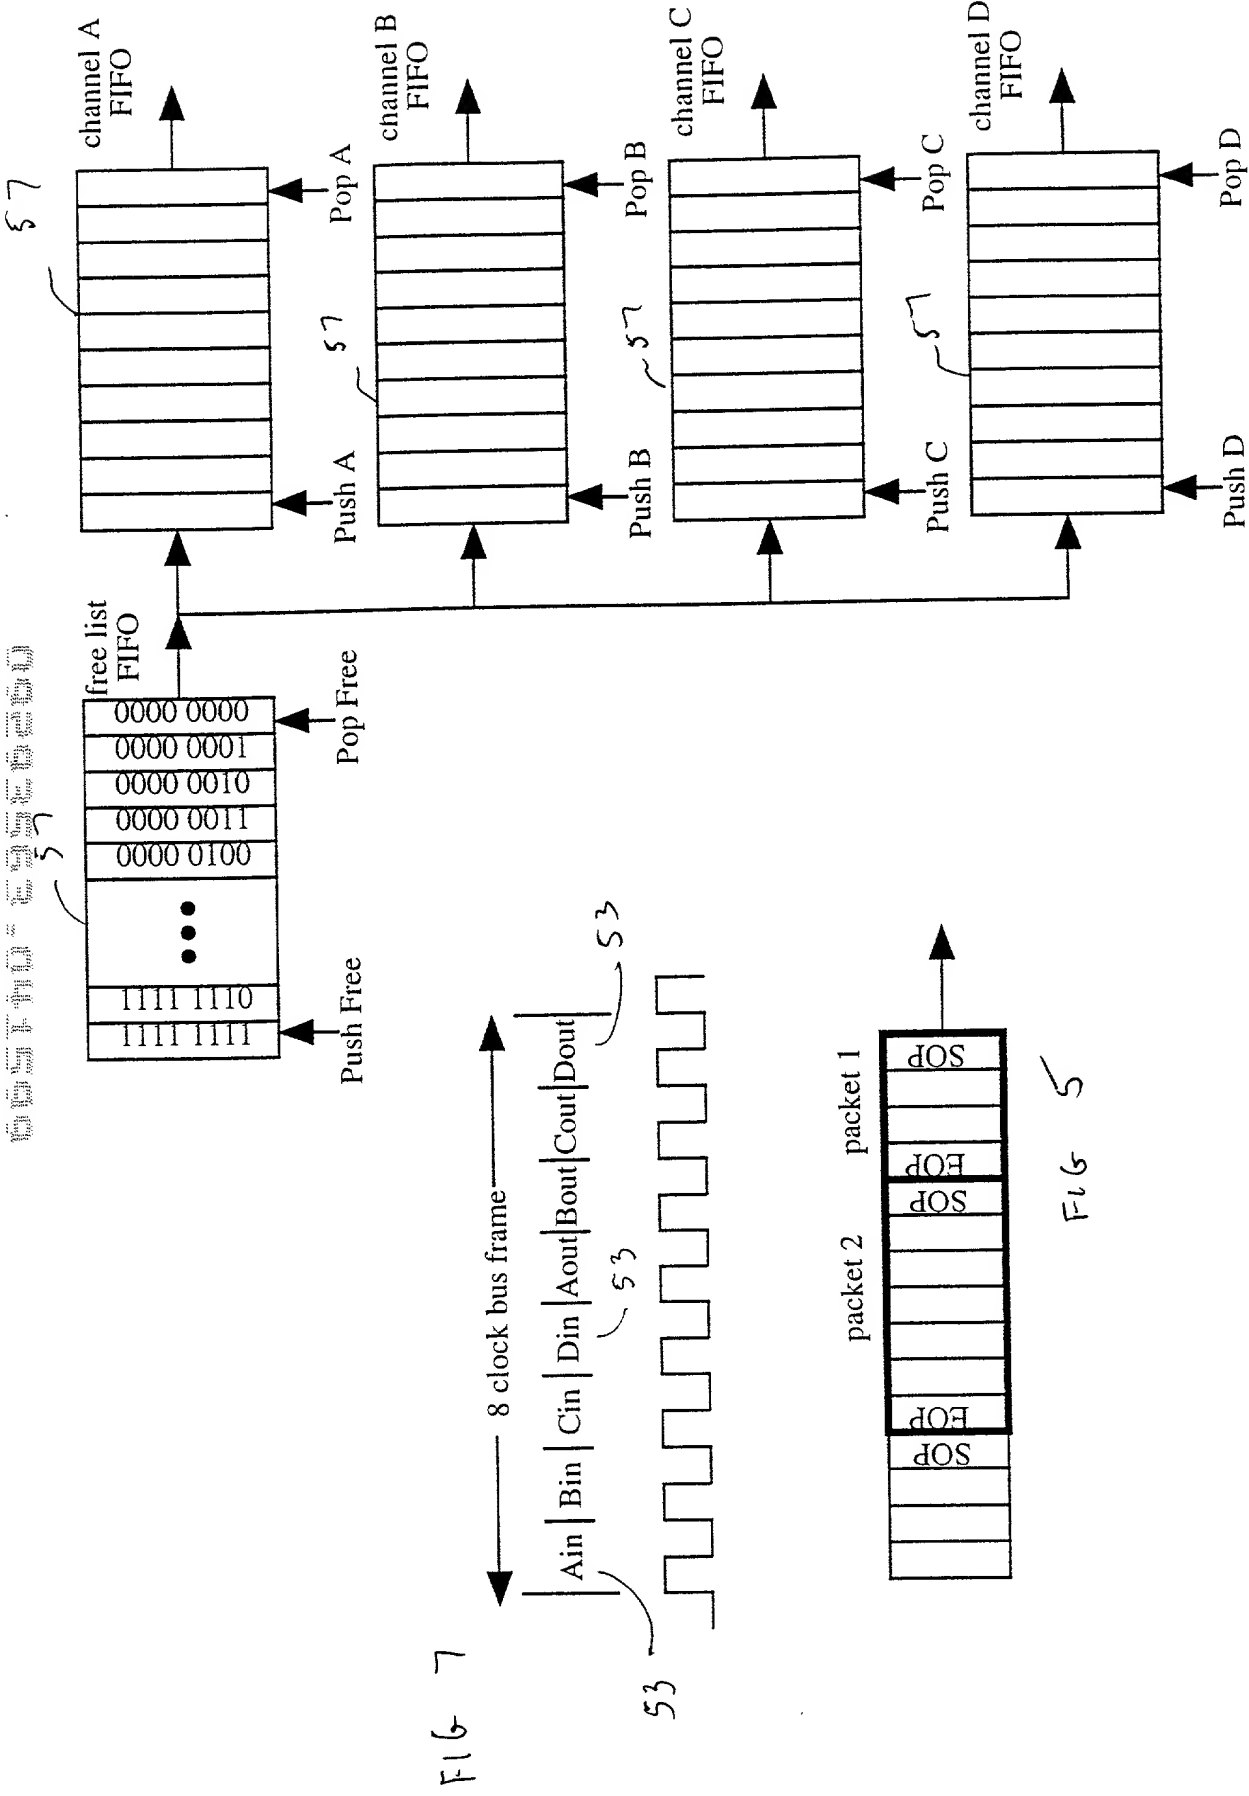


FIG 9